

Accountability Starts With You

The material presented within this course is for educational and training purposes only. All parties involved in the development, distribution, and maintenance of this course shall be held harmless from any incident resulting from misuse of the content beyond the guidelines and purposes herein stated. Before you begin, you should understand that it is your responsibility to adhere to the laws and regulations presented in the following course and its corresponding materials. Likewise, it is your further responsibility to strictly follow any additional guidelines specific to your own workplace. Good luck & stay safe!



Welcome to the Trailwalk Training Series!




Welcome to the Trailwalk Training Series. Today, we will be talking about the hazards associated with Hydrogen Sulfide (H_2S) and how to protect yourself from its deadly effects. The course is divided into 6 sections. Watch the video for each section and then complete a quiz. After the last section there is a final exam to test your knowledge about H_2S .



H₂S AWARENESS
SAFETY TRAINING



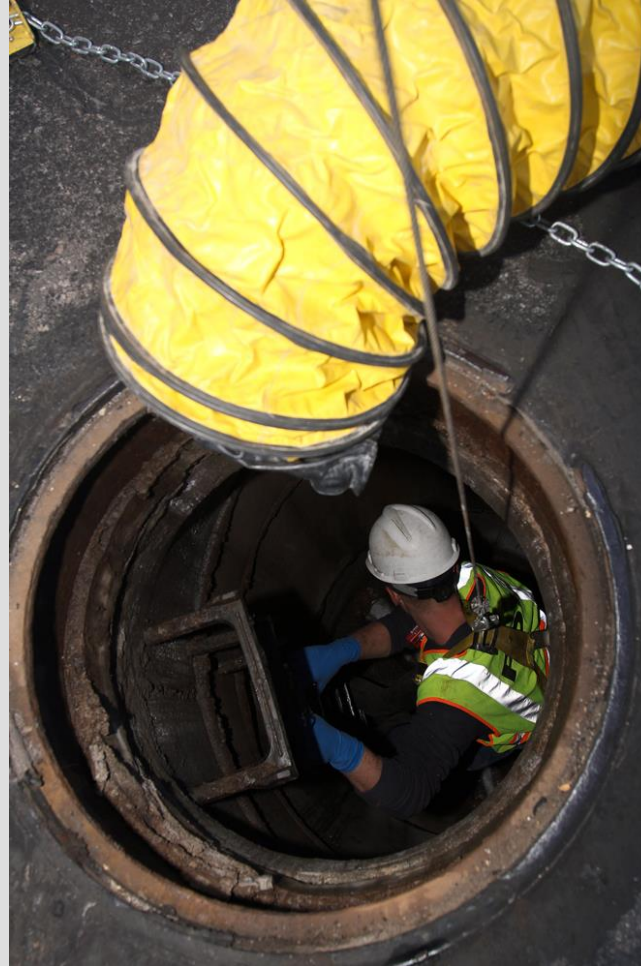

What Is H₂S?

H₂S is a colorless gas that is created naturally as bacteria breaks down organic material and waste from humans and animals. It occurs primarily in sewage and oil, but may also occur anywhere there is lots of biodegradation, such as swamps or manure stockpiles.



H₂S is denser than air. This causes a major hazard, as it will settle in lower areas, displacing air and cutting off oxygen supply. H₂S is also soluble in water, oil, and gas. For this reason, confined spaces, holes, trenches, and poorly-ventilated areas are more likely to contain H₂S.



H₂S is also very flammable and an explosive hazard. It's important, when working in areas where H₂S is present, that you take care not to use any electric, gas, or other tools that may cause a spark.





H₂S is toxic to the body and can kill in minutes, depending on the conditions. We will go more in depth about the symptoms and effects of H₂S later in the presentation.





Photo courtesy of earthjustice.org



Photo courtesy of greenliving.com



Photo courtesy of glorchem.lk



Photo courtesy of Wikipedia.com



Photo courtesy of jordilabs

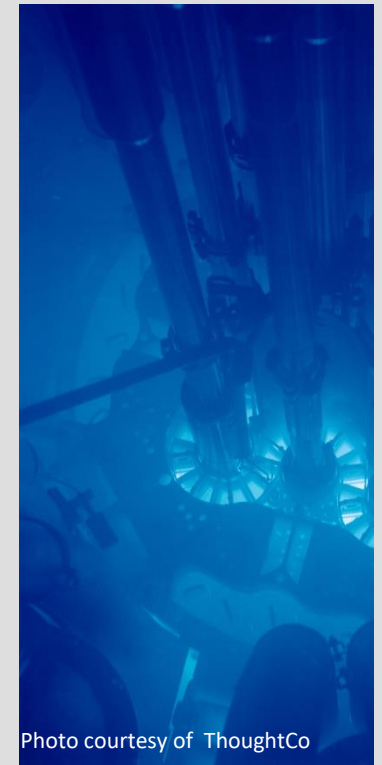


Photo courtesy of ThoughtCo

Although it is primarily a biproduct, some companies use H_2S to produce pure sulfur. It can also be used in products such as pesticides, leathers, dyes, and pharmaceuticals. It is often used to create heavy water, a substance that allows nuclear reactors to function without enriched uranium.





Hydrogen Sulfide is most commonly found in oil operations, but many incidents occur with waste water treatment plants, and sewers. Exposure to H₂S may also occur in swamps or agricultural silos and manure pits, it is created by the bacterial breakdown of organic materials. Other jobs where there may be risk of exposure are pulp, paper, and food processing, hot asphalt paving, mining, and other textile industries.



Helpful Terms

Before proceeding, let's take the time to define a few terms that will be helpful as you navigate the course. **Parts per million (ppm):** A means to measure the concentration of H_2S . Parts per million indicates how many volume-based units out of a million the substance in question makes up.





Both OEL and TWA refer to the maximum exposure to H₂S in a given time period.

Occupational Exposure limit, or OEL the maximum amount of exposure workers can have over a designated amount of time, usually 8 hours.

TWA: TWA (Time Weighted Average) is a term commonly used with H₂S and by Halifax Water. TWA means:

- an average value of exposure over the course of an 8 hour work shift.

Acceptable Ceiling Concentration: The maximum amount of a substance that a worker can be exposed to during a regular work day.



Regulated Areas: Areas that are marked off and designated by the employer where H₂S is or might be present. These areas should have appropriate warning signs. Only workers who have been properly trained should ever enter a regulated area.





Competent Person: One who is capable of recognizing H₂S hazards and has the authority to take immediate corrective measures to mitigate or eliminate them. A competent person should know how to test for H₂S, what to do in case of exposure, and how to respond to emergency situations.





Qualified Person: A qualified person has a degree, certificate, professional standing, extensive knowledge, training, and experience with whatever subject is being referenced. They will have the ability to identify, resolve, and solve issues in the particular field or work being performed.



We will be talking a lot about **Confined Spaces**. What is a confined space?

1. Is large enough and so configured that an employee can ***bodily*** enter and perform assigned work (with openings as small as 18 inches in diameter)
2. Has limited or restricted means for entry or exit
3. Is *not* designed for continuous occupancy (often used for storing or transporting substances; occasional entry for repair, cleanup, and maintenance)

With this in mind, understand that countless workplaces contain spaces that are considered “confined.”





CANADIAN STANDARDS
ASSOCIATION



STANDARDS

B.C.-Workplace B.C.

Manitoba- Safe Work Manitoba

New Brunswick- Occupational Health and Safety Act

Ontario- Ministry of Labor Ontario

Quebec- Legis Quebec Ch. 2.1, r. 13

Alberta-Alberta Labour OHS Regulations

NS - Occupational Health and Safety Act

These are some of the main standards concerning H₂S safety. Many provinces have additional standards, as do some industries. We have provided these as a guide, but it's your responsibility to know all federal, local and company rules that apply to your job site.



 Halifax Regional Water Commission	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 09
	Safe Work Practices HAZARDOUS SPACES	Updated: 2/11/2021

PRACTICE 22: Hazardous Spaces

Purpose

To instruct Employees on how to safely enter a hazardous space.

Definitions

Hazardous Space — an enclosed or partially enclosed space that meets one (1) of the following criteria:

- is not designed or intended for regular human occupancy;
- has restricted access or exit; and
- is or may become hazardous to a person entering it because of its design, construction, location, atmosphere, or the materials or substances in it or other conditions.

Examples of hazardous spaces could include, but are not limited to: underground control chambers, pumping stations, dry or wet wells, wastewater treatment facilities, and rotating biological contactors (RBCs)



 Halifax Regional Water Commission	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 09
	Safe Work Practices HAZARDOUS SPACES	Updated: 2/11/2021

Physical Agent — relates to threshold limit values for occupational exposure, means an agent of acoustic, electromagnetic, ergonomic, mechanical or thermal nature.

TLVs and BEIs — the latest version of the publication of the American Conference of Governmental Industrial Hygienists of threshold limit values and biological exposure indices.

Threshold Limit Values — the threshold limit values established by the TLVs and BEIs that represent:

- chemical substances, and the airborne concentrations of chemical substances and conditions under which it is believed that nearly all healthy workers may be repeatedly exposed, day after day, over a working lifetime, without adverse health effects;
- for physical agents, the levels of exposure and conditions under which it is believed that nearly all healthy workers may be repeatedly exposed, day after day, without adverse health effects.



HEALTHIER WORKPLACES | A HEALTHIER WORLD

American Conference of Governmental
Industrial Hygienists



 Halifax Regional Water Commission	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 09
	Safe Work Practices HAZARDOUS SPACES	Updated: 2/11/2021

Roles and Responsibilities

- **Responsibilities of the Supervisors**
 - Ensure the space is labeled and identified to Employees as a hazardous space.
 - Develop SOPs for Employees entering a hazardous space which outlines the safety precautions noted within this practice.
- **Responsibilities of the Employees**
 - Use gas monitors when entering hazardous spaces.
 - Inform their Supervisor of any issues encountered when entering hazardous spaces.
 - Make recommendations on how to improve safety measures within hazardous spaces.



 Halifax Regional Water Commission	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 09
	Safe Work Practices HAZARDOUS SPACES	Updated: 2/11/2021

Practices/ Procedures

HAZARDOUS SPACES PROCEDURE	DESCRIPTION
General Safety Measures	<ul style="list-style-type: none">• Supervisor must determine if a space is considered hazardous prior to work being conducted.• If the space is considered to be hazardous then it must be labeled a hazardous space.• Underground control chambers must be tested at 3 levels. The air quality can be measured using a gas meter equipped with an aspirated pump and tubing. Test the air for 2 minutes plus 2 seconds per foot of tubing. Test at 3 depths: top, middle and bottom of chamber and record readings on the log sheet.• An SOP will be developed to follow while performing work in that particular hazardous space.• Follow Gas Monitoring Procedure, Section 27.
Entering a Hazardous Space	Employees must be equipped with personal gas monitor before entering a hazardous space.



Halifax Water uses a H₂S TWA level of 3 PPM and an acceptable ceiling limit of 5 PPM. Once concentration levels of H₂S exceed 3 PPM all workers should leave the area immediately. Make sure that all workers in the area are informed of the danger, and that everyone makes it out of the contaminated area safely.





Once the H_2S concentration reaches 100 ppm, it is considered immediately dangerous to life and health. At this level, your ability to smell the gas disappears, and anyone exposed will begin to feel drowsy and have altered breathing. Workers need to evacuate the contaminated area immediately and get fresh air.





Training

The purpose of this presentation is to help you understand the hazards that hydrogen sulfide presents and how to safely work when there is potential for exposure. At the completion of this training, workers should understand the risks, locations, and emergency procedures associated with H₂S. Training is vital for helping workers stay safe when jobs include risk of exposure to H₂S. No matter what controls, procedures, and precautions are implemented on a job, they will be worthless unless workers are trained on how to properly utilize them.



We will discuss H₂S's different concentrations, as well as how exposure to it affects the body. This section will also cover medical surveillance for work around H₂S.





We will talk about monitoring and identifying the location and possible hazards of the H₂S concentration in question. We will also offer instruction on proper procedures for monitoring confined spaces and other areas that may contain H₂S.






We will go in depth on basic practices that will keep workers safe when an H₂S hazard is present. This will include monitoring, evacuation plans, confined space procedures, and emergency situations. These applications will vary according to jobsite. Employers should discuss the rules, procedures, and applications that are specific to your jobsite.



The last term to become familiar with is **PPE (Personal Protective Equipment)**. This term refers to any equipment or gear used to help keep you safe.

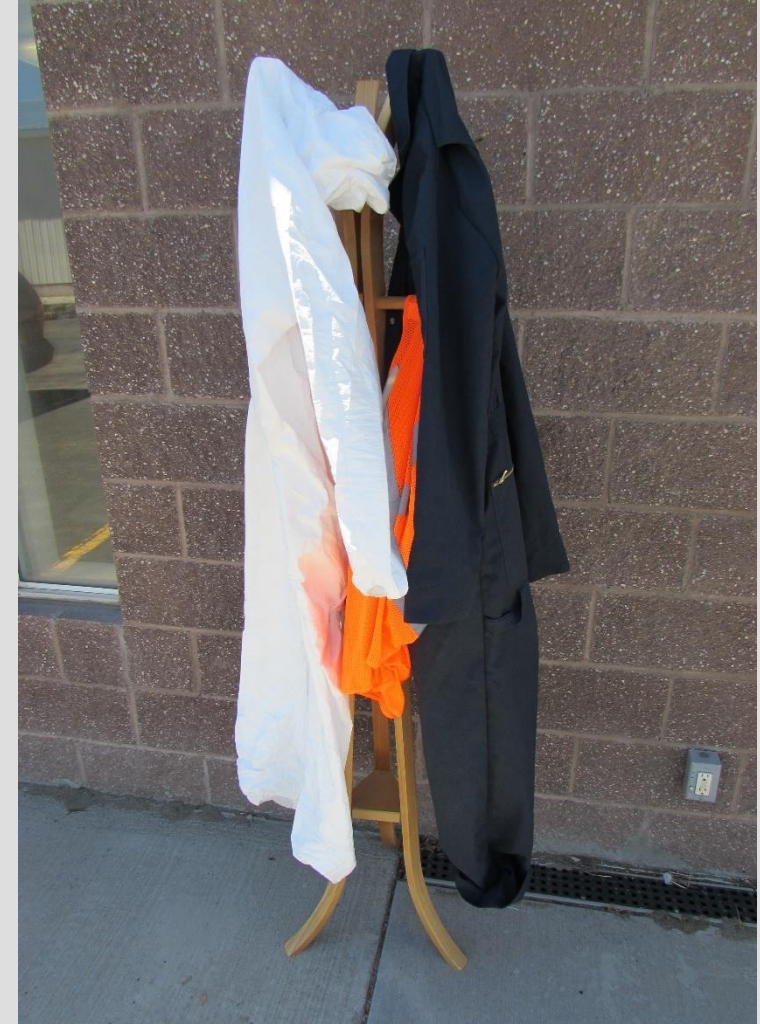

We will spend time going over the PPE that you must wear when the risk of H₂S is present. This will include instructions for the proper care of your PPE and donning and doffing PPE on worksites that might be exposed to H₂S.





H₂S is dangerous. At levels as low as 5 parts per million, it begins to affect the body negatively. At higher concentrations, it can cause death almost instantaneously. To make matters worse, H₂S is completely invisible to us. However, with the proper training, precautions, and equipment, you can keep yourself from being exposed to this dangerous gas.






H₂S Exposure



Exposure Routes

The most common and most dangerous route of exposure to H_2S is through inhalation. H_2S does not disperse in the air. As a result, it often condenses, allowing for the concentration to spike rapidly in comparison to other atmospheric gases. Because it is heavier than air, these high concentrations are commonly found in confined spaces, trenches, or other low-lying ground. However, this isn't always the case.

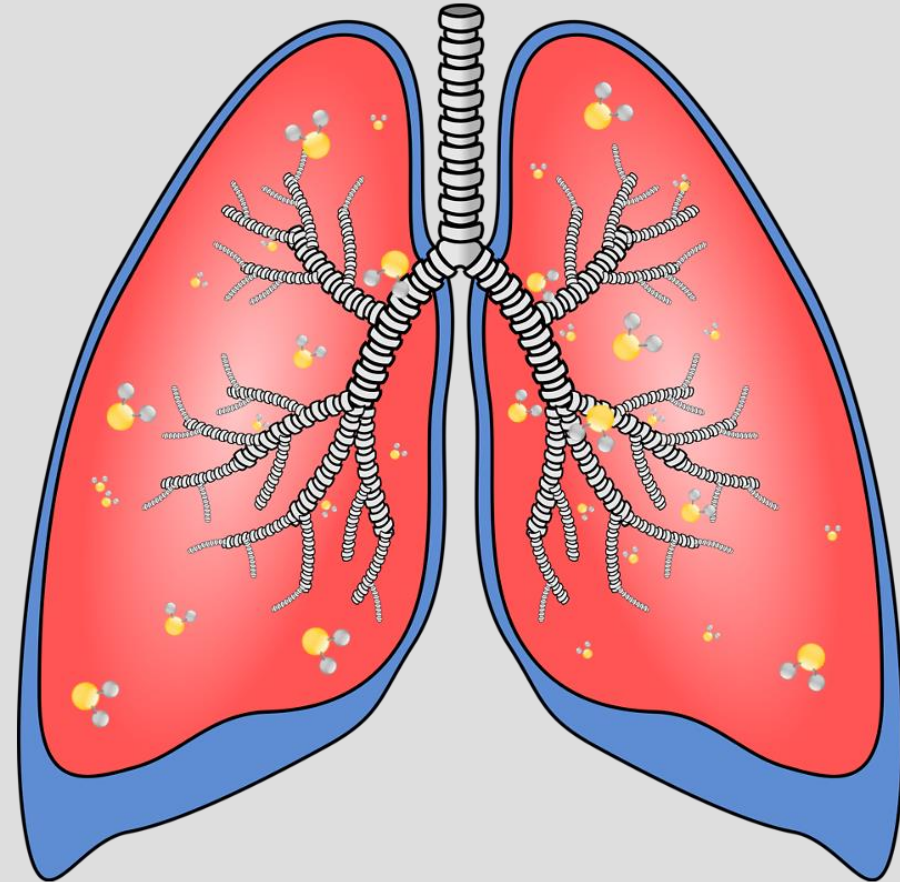


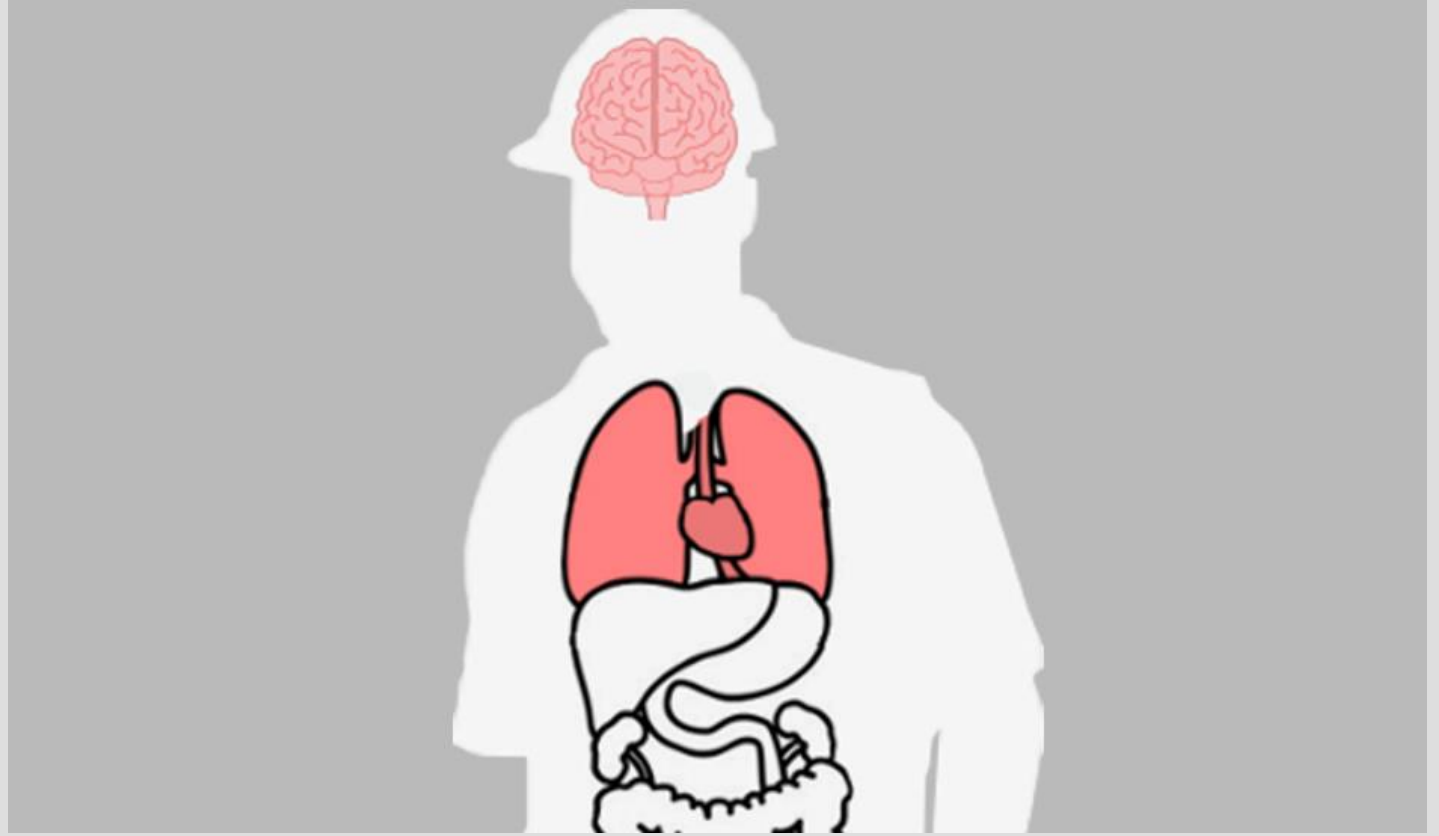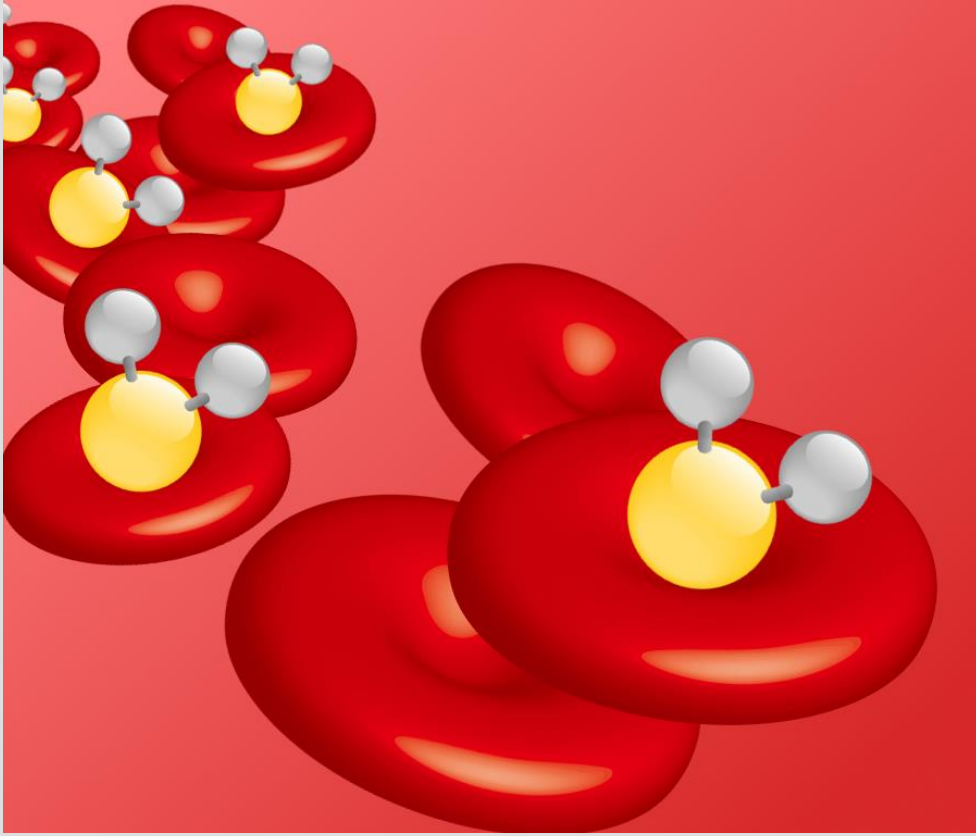

Hydrogen Sulfide will affect you in multiple ways. Some examples of these effects are the saturation your red blood cells and prevention of oxygen from being dispersed throughout the body. The main targets of H₂S are the nervous system and the respiratory system.



After being attached to blood cells, H_2S is transported to the brain. From there, it begins to shut down the nervous system, leading to fatigue and dizziness. H_2S will also attack the respiratory system and, at high enough concentrations, completely shut it down. This quickly leads to unconsciousness and death.



H₂S is also a known eye irritant and may cause lasting damage after exposure. At concentrations as low as 50 ppm, it can cause acute conjunctivitis. Do not wear contacts when working with H₂S.





Although rare, H_2S can grab onto liquids in the environment when they are at freezing temperatures. If exposed to skin, this can lead to frostbite. In liquid form, there is a chance of explosion. If your clothing gets wet from H_2S -contaminated liquids, carefully remove it and let it dry in an isolated area.



Effects vs Concentrations

The danger that H₂S presents depends on the concentration of the gas. If the concentration is low, it will only cause discomfort, but as the concentration rises, the effects of the gas can cause severe damage, unconsciousness, and eventually death.



The body can get rid of H_2S naturally, and most people who are exposed make a full recovery, although some have complained of chronic issues after exposure. The primary time to be concerned is when there are high levels of exposure within a short period of time.





Did you know?

H_2S is actually a natural bi-product of certain bacteria found in the human body. Because of this, the body is adept at getting rid of H_2S naturally

when exposed to small doses. However, it can be quickly overwhelmed when exposed to highly concentrated doses.



Symptoms vary by concentration. At 2 ppm, prolonged exposure may result in nausea, watery eyes, headaches, and loss of sleep. When concentrations reach 20 ppm, symptoms escalate to dizziness and fatigue, loss of appetite, irritability, and poor memory.

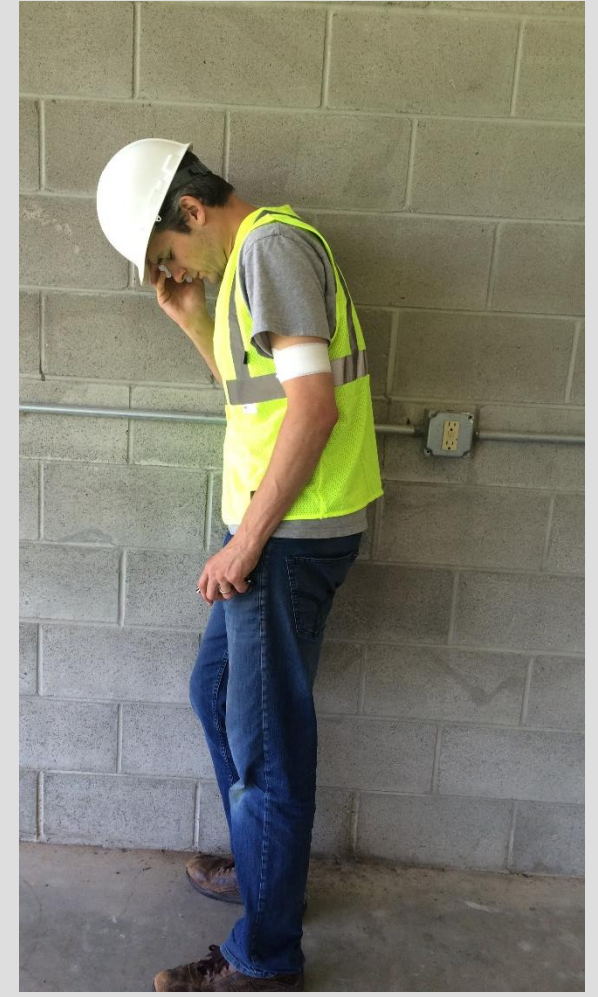



When concentrations reach 50 ppm, those exposed will present slight conjunctivitis or “gas eye” and respiratory tract irritation after about an hour. When concentrations are at 100 ppm, these symptoms will escalate to eye irritation, altered breathing, coughing, and throat irritation. At this point, you will lose the ability to smell the gas.




At concentrations exceeding 200 ppm, exposed workers will suffer marked conjunctivitis. Damage to the lungs that results from corrosive gaseous properties can result in pulmonary edema (lungs filling with fluid). As concentrations reach 500 ppm, workers will collapse within 5 minutes of exposure, suffer severe damage to the eyes, and die in less than an hour.



Once the concentration exceeds 700 ppm, exposed workers will lose consciousness in one to two breaths. Death will occur within minutes. Concentrations exceeding 1000 ppm will result in near-instant death.



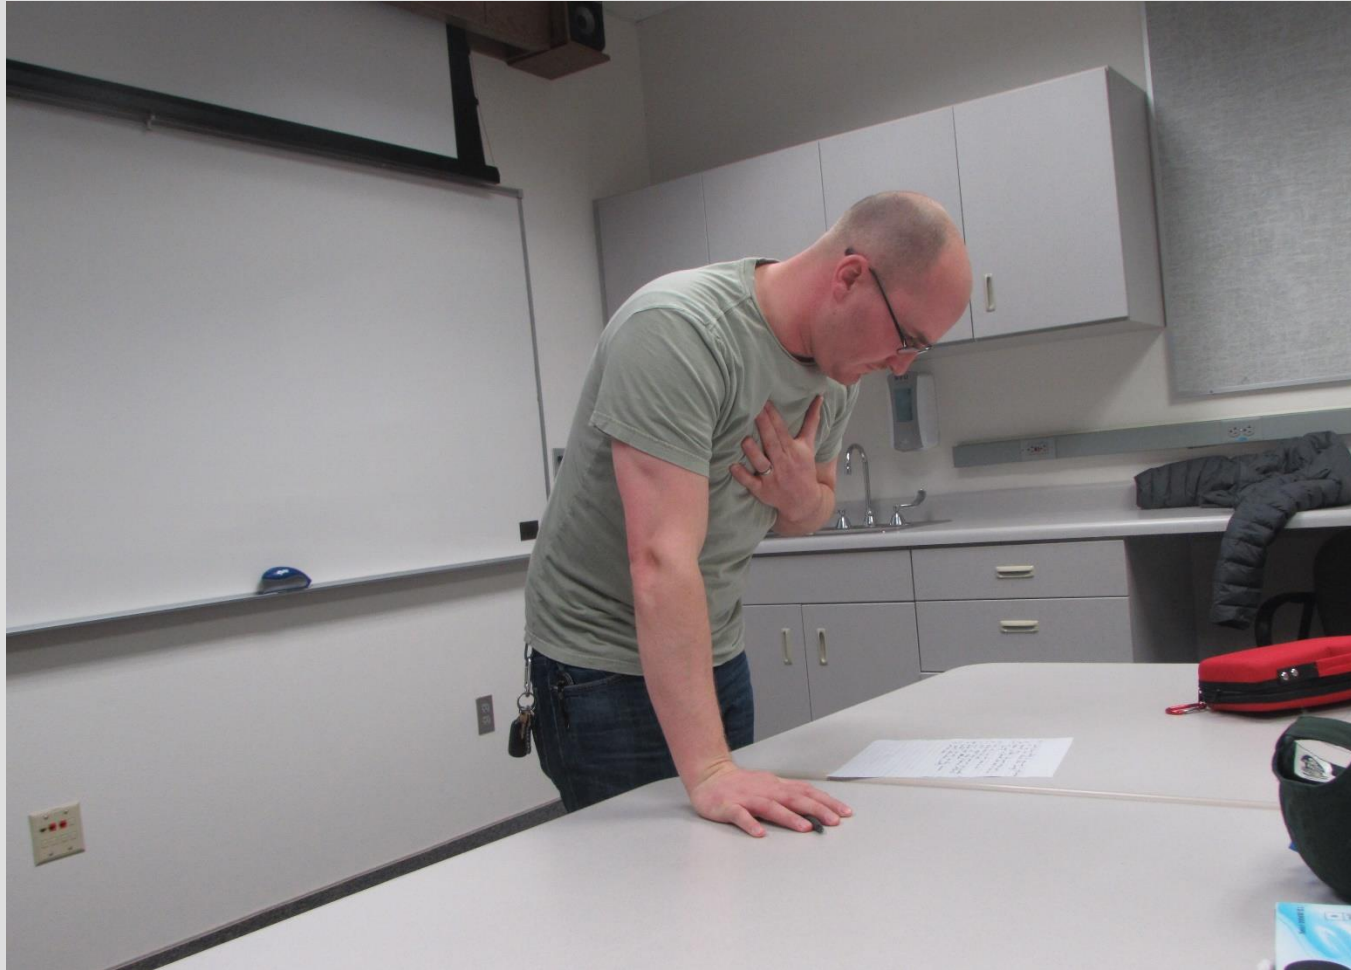

The body is designed to expel H_2S at lower concentrations.

The following First Aid measures for H_2S should be followed.



What are First Aid Measures for Hydrogen Sulfide?

Inhalation: Take precautions to prevent a fire (e.g. remove sources of ignition). Take precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). Move victim to fresh air. Keep at rest in a position comfortable for breathing. If breathing is difficult, trained personnel should administer emergency oxygen. DO NOT allow victim to move about unnecessarily. Symptoms of pulmonary edema may be delayed. If breathing has stopped, trained personnel should begin artificial respiration (AR). If the heart has stopped, trained personnel should start cardiopulmonary resuscitation (CPR) or automated external defibrillation (AED). Avoid mouth-to-mouth contact by using mouth guards or shields. Immediately call a Poison Centre or doctor. Treatment is urgently required. Transport to a hospital. NOTE: Victims may pose a threat to responders due to the release of hydrogen sulfide from their clothing, skin, and exhaled air.

Skin Contact: Liquefied gas: quickly remove victim from source of contamination. DO NOT attempt to rewarm the affected area on site. DO NOT rub area or apply direct heat. Gently remove clothing or jewelry that may restrict circulation. Carefully cut around clothing that sticks to the skin and remove the rest of the garment. Loosely cover the affected area with a sterile dressing. DO NOT allow victim to drink alcohol or smoke. Immediately call a Poison Centre or doctor. Treatment is urgently required. Transport to a hospital. Double bag, seal, label and leave contaminated clothing, shoes and leather goods at the scene for safe disposal.

Eye Contact: Gas: immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15-20 minutes, while holding the eyelid(s) open. Liquefied gas: immediately and briefly flush with lukewarm, gently flowing water. DO NOT attempt to rewarm. Cover both eyes with a sterile dressing. DO NOT allow victim to drink alcohol or smoke. Immediately call a Poison Centre or doctor. Treatment is urgently required. Transport to a hospital.

Ingestion: Not applicable (gas).

First Aid Comments: Some of the first aid procedures recommended here require advanced first aid training. All first aid procedures should be periodically reviewed by a doctor familiar with the chemical and its conditions of use in the workplace.



H₂S Monitoring



One of the most dangerous aspects of H_2S is that it is almost entirely undetectable by the human senses. At lower concentrations, it lets off a putrid odor that smells like rotten eggs. However, at higher levels, 50 ppm and above, H_2S will be completely odorless. **It is vitally important that you never rely on your sense of smell to detect H_2S .**



Where Is H₂S Found?

Because H₂S is the bi-product of bacteria breaking down organic materials it is often present in sewage. It is also commonly found in manure pits during agricultural operations and marshes where lots of organic material is breaking down. The most common occupational source, however, is crude oil operations.



Photo courtesy of wordpress.com



Photo courtesy of inquisitr.com

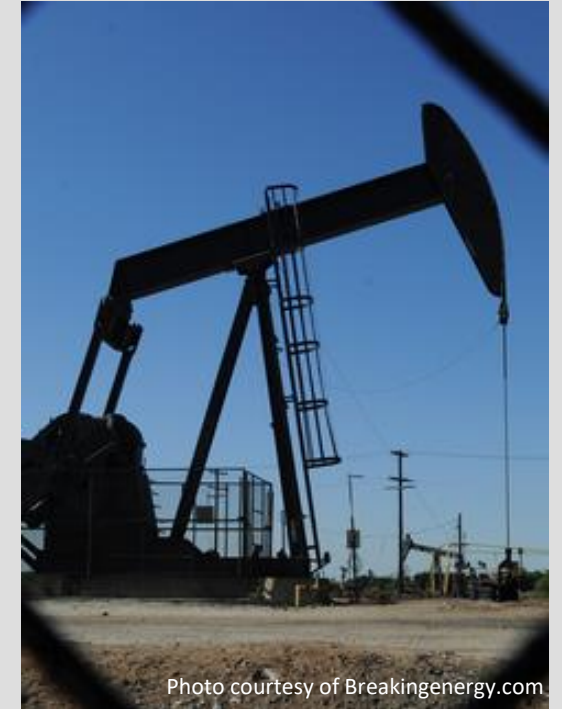


Photo courtesy of Breakingenergy.com



H₂S AWARENESS
SAFETY TRAINING





Photo courtesy of vertexaccess.com

H₂S is completely soluble in water, oil, and gas. When any of these liquids has dissolved H₂S, and is disturbed, it will release the toxic gas into the air. For this reason it is vital that H₂S in the air is continually monitored in confined spaces, oil operations, and wastewater treatment and sewage operations.





H₂S will accumulate at the lowest points possible. Air testing and monitoring should be performed anytime work is being done in low-lying areas such as trenches or pits, that are close to areas that might have H₂S gas, including marshes, water treatment plants, or petroleum operations.





H₂S is among the most common gasses found in confined spaces, and it is also one of the most toxic. When H₂S is in a confined space, it will displace the oxygen, creating an extremely dangerous atmosphere for unsuspecting victims.





Although confined spaces and low-lying areas have been stressed, they are not the only places where H₂S can be present. It can be detected in many work areas, especially in oil operations. You should never assume that you are not at risk because you are not in an enclosed space or are on high ground.





In some industries, H_2S is found in pipes, containers, or other systems. If H_2S is freed from these structures too suddenly, the pressure can cause a toxic cloud to be spewed that instantly incapacitates those who are exposed to it. As such, special care must be taken around these systems.



Monitors

Some worksites have monitors and alerts set up to detect gases or leaks in certain areas. Anytime a gas leak is detected, workers in that area should be notified and cleared in case the accumulation of H_2S leads to dangerous concentration levels.

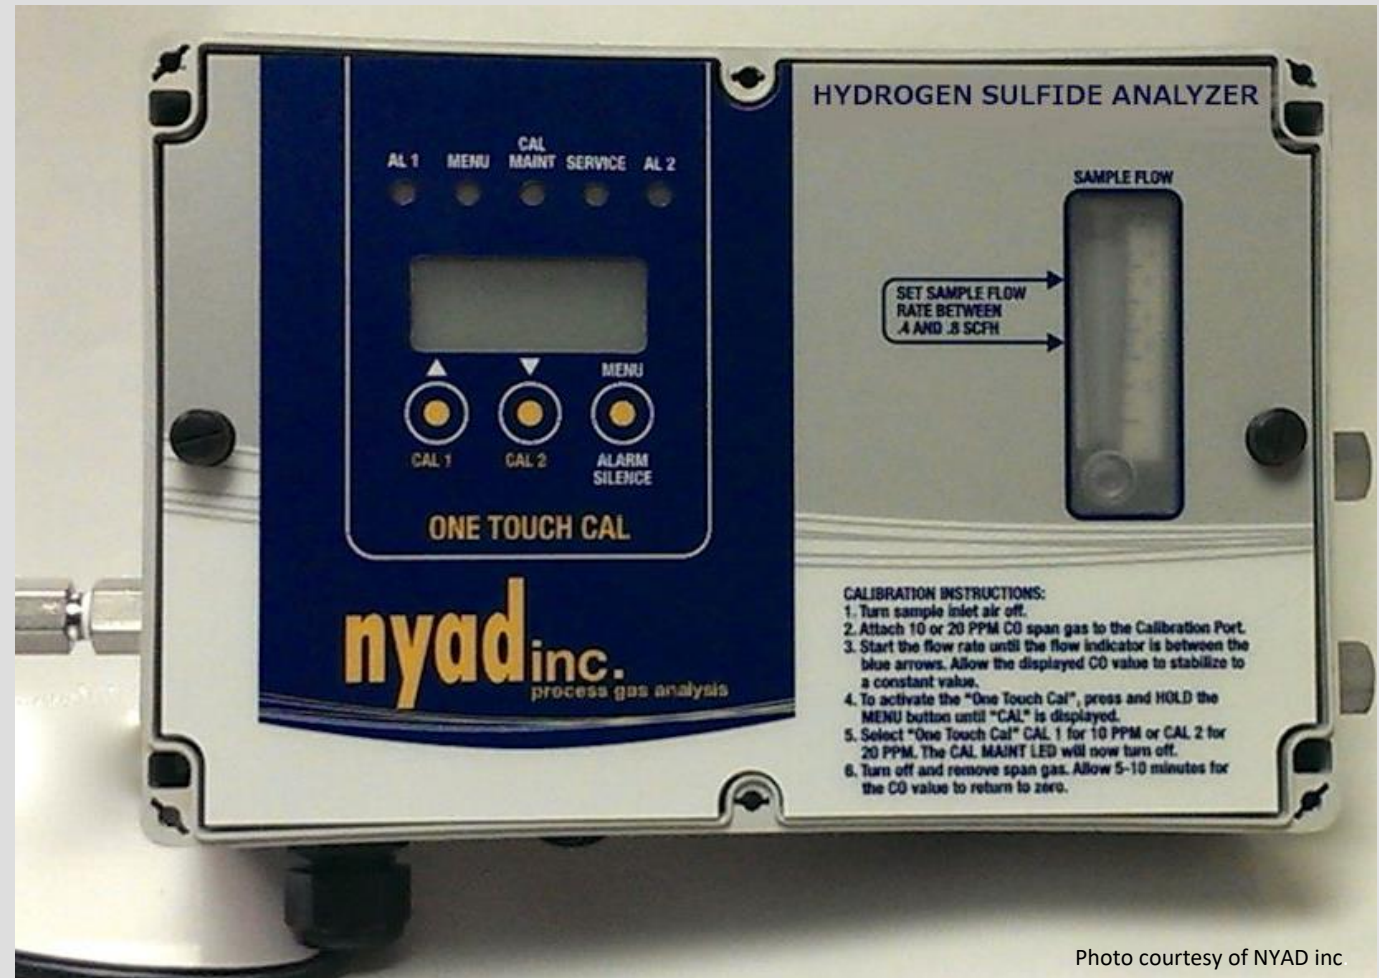


Photo courtesy of NYAD inc





Photo courtesy of directindustry.com

Many worksites that deal with H₂S or run the risk of exposure to H₂S will equip their workers with personal gas monitors. These monitors are small and can be clipped to clothes and worn by workers. With monitors, they can monitor H₂S and be alerted in case it reaches dangerous levels.




Workers with personal air monitors need to be trained on how to use them, where on their bodies to fasten them, and how to interpret the readings. Workers ought to be thoroughly instructed on what levels are safe and what to do when exposed to unsafe levels.





Photo courtesy of youtube.com

Personal air monitors need to be calibrated on a regular basis. Be sure to check the owner's manual for instructions regarding when and how to do this. Monitors that have not been calibrated within the designated time frames are not reliable and should not be used in the field.






As best practices go, you should bump test (field test) and check calibrations on your monitors regularly in order to ensure that the alarms, both visual and audible, are working and responding at the correct levels. How often is “regularly?” A bump test or calibration check of portable gas monitors should be conducted before each day’s use in accordance with the manufacturer’s instructions.





If the instrument fails the bump test or calibration check, you must perform a full calibration on it before use. If it fails the full calibration test, it must be immediately removed from service. Always follow the manufacturer's instructions regarding these tests and their frequency. All tests should be done with a certified (and up-to-date) traceable gas and in an environment that imitates normal working conditions (temperature, humidity, atmospheric pressure, etc.)






Did you know?

A daily bump test can save your life...

On a given day, it is estimated that 1 in 2,500 untested gas monitors will fail to respond to a dangerous concentration of gas. A bump test, also called a field test, is a functionality test of sensors and alarms. You should receive training on how to properly administer this test. A bump test is performed by exposing the monitor/sensors to a known concentration of the target gases, then verifying that the display has correctly reported the correct concentration and that the appropriate alarms have sounded.

Multiple gas mixtures are available in one canister, allowing you to do a simultaneous bump test for different types of gases. Only use a certified traceable gas

All gas detectors should be calibrated according the manufacturer's recommendations. Calibration is done with a known gas concentration that can be at the exact alarm point or at a higher concentration where the set point can be adjusted. This varies between manufacturers. If you are bump testing on a regular basis, you can wait until that test indicates that a re-calibration is required. If bump tests are not performed, then the unit should be re-calibrated on a regular basis. Manufacturer's recommendations vary from daily to every three to six months to never. "Never," of course, should never be an option.





	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

SECTION 27: GAS MONITORING

27.01 Purpose

The intent of this procedure is to ensure the health and safety of Halifax Water Employees at all times when using gas monitors.

27.02 Scope


This procedure shall apply to all confined spaces, hazardous spaces, and facilities under the care and control of Halifax Water including all contracted services.

27.03 Definitions

“ACGIH” — is the American Conference of Governmental Industrial Hygienists.

“Clean Respirable Air” — when used to describe the atmosphere inside a Confined Space, means an atmosphere which is equivalent to clean, outdoor air and which contains:

- about 20.9% oxygen by volume;
- no measurable flammable gas or vapour as determined using a calibrated gas measuring instrument; and
- no air contaminant in concentrations exceeding either 10% of its applicable threshold limit value as published by the ACGIH.



	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

SECTION 27: GAS MONITORING


“Competent Person” — means a person who:

- is qualified because of that person’s knowledge, training and experience to do the assigned work in a manner that will ensure the health and safety of every person in the workplace, and
- is knowledgeable about the provisions of the Act and regulations that apply to the assigned work, and about potential or actual danger to health or safety associated with the assigned work.

“Confined Space” — an enclosed or partially enclosed space that:

- is not designed or intended for regular human occupancy;
- has restricted access or exit; and
- is or may become hazardous** to a person entering it because of its design, construction, location, atmosphere, or the materials or substances in it or other conditions.

**When assessing whether a space is or may become hazardous because of its atmosphere, a person may not take into account the use of PPE or ventilation as this can fail.



	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

SECTION 27: GAS MONITORING

“External Service Provider (ESP)” — is an organization, corporation or person, who provides project or contracted services to Halifax Water in accordance with contract specifications, terms, and conditions.

“Lower Explosive Limit (LEL)” — means the lowest concentration (in air) of a gas or vapour that is needed for the gas to ignite.

“Supervisor” — any Halifax Water Employee who supervises or provides oversight of another Employee that enters Confined Spaces.

“Threshold Limit Values” — means the threshold limit values established by the TLVs and BEIs that represent:


- chemical substances, the airborne concentrations of chemical substances and conditions under which it is believed that nearly all healthy workers may be repeatedly exposed, day after day, over a working lifetime, without adverse health effects;
- for physical agents, the levels of exposure and conditions under which it is believed that nearly all healthy workers may be repeatedly exposed, day after day, without adverse health effects.

“TLVs and BEIs” — means the latest version of the publication of the American Conference of Governmental Industrial Hygienists of threshold limit values and biological exposure indices.

“Upper Explosive Limit (UEL)” — means the highest concentration (in air) of a gas or vapour that is needed for the gas to ignite.



Lower and Upper Explosive Levels (LEL/UEL)

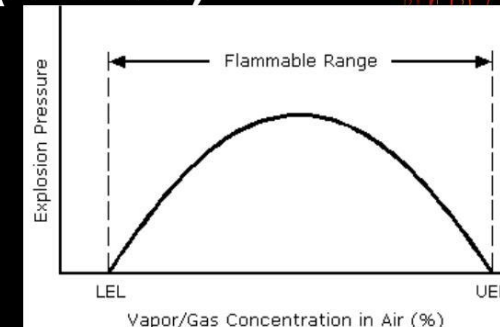

	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

SECTION 27: GAS MONITORING

27.04 Roles and Responsibilities

Responsibilities of the Supervisor

Supervisors must ensure that the standards required by this procedure are followed at all times when using gas monitors. Supervisors are directly responsible for ensuring the health and safety of Employees under their supervision in the workplace. Supervisor shall ensure that all Employees under their control are adequately trained to operate gas monitoring equipment and understand the requirements of this procedure. A monthly review of alarms recorded in the DS2 docking station server should be completed.


These responsibilities may be delegated to another designated competent person provided he/she is trained and qualified in all aspects of this procedure.

Responsibilities of the Employees

Employees must follow this procedure and communicate safety or procedural deficiencies encountered in the field to their Supervisor. All Halifax Water Employees shall attend equipment training exercises as directed by their Supervisor so as to ensure their familiarity with the safe operation of gas monitoring equipment used by Halifax Water.

Responsibilities of External Service Providers

ESP's must provide valid gas monitors along with manufacturer specific training. Monitors must be capable of testing at minimum Lower Explosive Limit, Oxygen, Hydrogen Sulphide, and Carbon Monoxide.



OCCUPATIONAL HEALTH & SAFETY
PROGRAM MANUAL

Section 27

GAS MONITORING

Updated:
10/07/2019

SECTION 27: GAS MONITORING

27.05 Implementation and Maintenance

Calibration of Testing Equipment

- All monitoring equipment shall be calibrated according to the frequency specified in the manufacturer's instructions or no more than once every 30 days.
- All monitoring equipment must be bump tested to a zero reading, as required by manufacturers' instructions prior to use.
- All failures of either bump test or calibration should be reported to your Supervisor.
- If Employees note issues with their gas monitor or the calibration gasses are low in the docking stations, they must notify their Supervisor who must arrange repairs.

Short Term Exposure Limit (STEL)

Short Term Exposure Limit (STEL) is defined by ACGIH as the concentration to which workers can be exposed continuously for a short period of time without suffering from:


- irritation
- chronic or irreversible tissue damage
- narcosis of sufficient degree to increase the likelihood of accidental injury, impair self-rescue or materially reduce work efficiency.

STEL's are generally used only when toxic effects have been reported from high acute (short-term) exposures in either humans or animals. A (STEL) is not a separate independent exposure limit, but supplements time-weighted average limits where there are recognized acute effects from a substance whose toxic effects generally chronic (long-term) in nature. For example, one cannot be exposed to a STEL concentration if the TLV-TWA (time weighted average) for an 8 hour shift would be exceeded. Workers can be exposed to a maximum of four STEL periods per 8 hour shift, with at least 60 minutes between exposure periods.



SAFE EXPOSURE LIMITS

Safe exposure limits are based upon a Time Weighted Average, or TWA. TWAs have been established for all the chemicals you work with and limit the average amount of a chemical you can be exposed to over an eight hour day.



	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

Time Weighted Averages (TWA)

Time Weighted Averages (TWA) are an average value of exposure over the course of an 8 hour work shift.

TWA levels are usually lower than ceiling values. Thus, a worker may be exposed to a level higher than the TWA for part of the day (but still lower than the ceiling value) as long as he/she is exposed to levels below the TWA for the rest of the day.

Most current testing devices have a built in means for calculating the TWA. The operator will need to consult the operating instructions for the particular device and need to understand why TWA is important to prevent over exposure to a person to a potentially toxic atmosphere and to determine when it is not safe to enter or continue to work in such atmospheres.

Threshold Alarms

Gas		Low Alarm	High Alarm
Carbon Monoxide	Above:	25	50
Oxygen	Below:	19.5	22.5
LEL	Above:	10	20
H ₂ S	Above:	3	5




Exposure Limits Defined in Three Ways

- Time Weighted Average (TWA)
- Ceiling
- Short Term Exposure Limit (STEL)

GfG Instrumentation



	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

SECTION 27: GAS MONITORING

Testing for Lower Explosive Limits (LEL)

- Halifax Water Employees shall not enter any space for any purpose at any time the atmosphere has been tested at more than 10% of LEL.
- When such results are obtained Employee will notify their Supervisor and inform them of the situation.
- Combustible, flammable or explosive atmospheres may and often exist together with toxic or oxygen deficient atmospheres.
- Combustible or flammable atmospheres are generally caused by:
 - evaporation of flammable liquids that have accidentally spilled or leaked into the infrastructure or illegally dumped (e.g., gasoline, solvents or other motor fuels)
 - by-products of chemical reactions (e.g., decomposition of organic matter, dead biologicals to form methane).
 - vapour releasing from Volatile Organic Compounds
 - Infiltration of Natural Gas from a leaking natural gas line.
- The elimination or control of all potential ignition sources is vital when combustible gases are detected at any level.



	OCCUPATIONAL HEALTH & SAFETY PROGRAM MANUAL	Section 27
	GAS MONITORING	Updated: 10/07/2019

Always follow the instructions and warnings provided by the manufacturer of the detection device.

Testing for Oxygen (O₂)


- Oxygen content above 22.5% can cause explosions or vigorous burning of flammable or reactive materials, including your hair or clothing.
- If oxygen content is less than 19.5% or greater than 22.5%, exit the space and contact your Supervisor.
- Oxygen meters may be adversely affected by high relative humidity, refer to manufacturers' instructions.
- When checking for oxygen in moist atmospheres, keep the probe pointed downward and wipe any water droplets from the probe should they develop.

Testing for Hydrogen Sulfide (H₂S)

- This gas is highly toxic, corrosive and flammable and may be found in any Halifax Water worksite.
- Hydrogen sulfide may be present where there are any connections to a live sewer or where any organic material is decaying.
- This gas will be released anytime sediment or liquid containing the material is disturbed.
- H₂S greater than 3 ppm will require immediate evacuation of the space by staff.

WARNING
OXYGEN AND GAS
TEST REQUIRED
BEFORE ENTERING

**WARNING**



H₂S poisonous
gas may
be present.
Use gas detector.



OCCUPATIONAL HEALTH & SAFETY
PROGRAM MANUAL

Section 27

GAS MONITORING

Updated:
10/07/2019


SECTION 27: GAS MONITORING

Testing for Carbon Monoxide (CO)

- The maximum allowable Threshold Limit Value for carbon monoxide exposure shall not exceed 25ppm for a time weighted average of 8 hours.
- Staff shall evacuate the worksite immediately if the carbon monoxide tests at 25 ppm or more.
- Carbon Monoxide is a tasteless and odorless gas which is a result of incomplete combustion of hydrocarbon products such as propane, kerosene, diesel and other automotive fuels.
- Carbon monoxide has been known to be trapped in rock fissures for weeks following the detonation of explosives.
- This gas is classed as an asphyxiate which means it has the ability to block oxygen from being absorbed by the blood stream.
- This gas has the same density of normal air and can be found at any level.
- Cartridge respirators cannot be used for protection under any circumstances, adequate ventilation and dilution of the atmosphere must be maintained.
- Symptoms include fatigue, flu like symptoms, and impairment of motor functions.

CAUTION**CARBON MONOXIDE
MAY BE PRESENT****CARBON MONOXIDE POISONING**


*You can't see it, taste it or smell it.
It can kill quickly and with no warning.
Knowing the signs could save your life.*

SIGNS



Confined Spaces

H₂S is among the most common hazards found in confined spaces, especially in the oil industry and in waste and water treatment systems. Because H₂S is heavier than air, oxygen levels need to be tested as well as H₂S.



Atmospheric testing should happen:

- When initially identifying a space
- Again before entering the confined space
- For the duration of the time work is being completed in that space (at least hourly for permit spaces; more often as warranted)
- Anytime work has ceased and then started up again

All evaluations and interpretations of the resultant data should be completed, or reviewed, by a technically qualified profession.



**OCCUPATIONAL HEALTH & SAFETY
PROGRAM MANUAL**


Section 09

**Safe Work Practices
HAZARDOUS SPACES**


Updated: 2/11/2021

Practices/ Procedures

HAZARDOUS SPACES PROCEDURE	DESCRIPTION
General Safety Measures	<ul style="list-style-type: none">• Supervisor must determine if a space is considered hazardous prior to work being conducted.• If the space is considered to be hazardous then it must be labeled a hazardous space.• Underground control chambers must be tested at 3 levels. The air quality can be measured using a gas meter equipped with an aspirated pump and tubing. Test the air for 2 minutes plus 2 seconds per foot of tubing. Test at 3 depths: top, middle and bottom of chamber and record readings on the log sheet.• An SOP will be developed to follow while performing work in that particular hazardous space.• Follow Gas Monitoring Procedure, Section 27.
Entering a Hazardous Space	Employees must be equipped with personal gas monitor before entering a hazardous space.




H2S Safe Work Practices



Hierarchy Of Controls

The hierarchy of controls is a system that shows you the best ways to remove or protect workers from hazards on jobsites. The process goes as follows:

- Elimination
- Substitution
- Engineering Controls
- Administrative Controls
- PPE

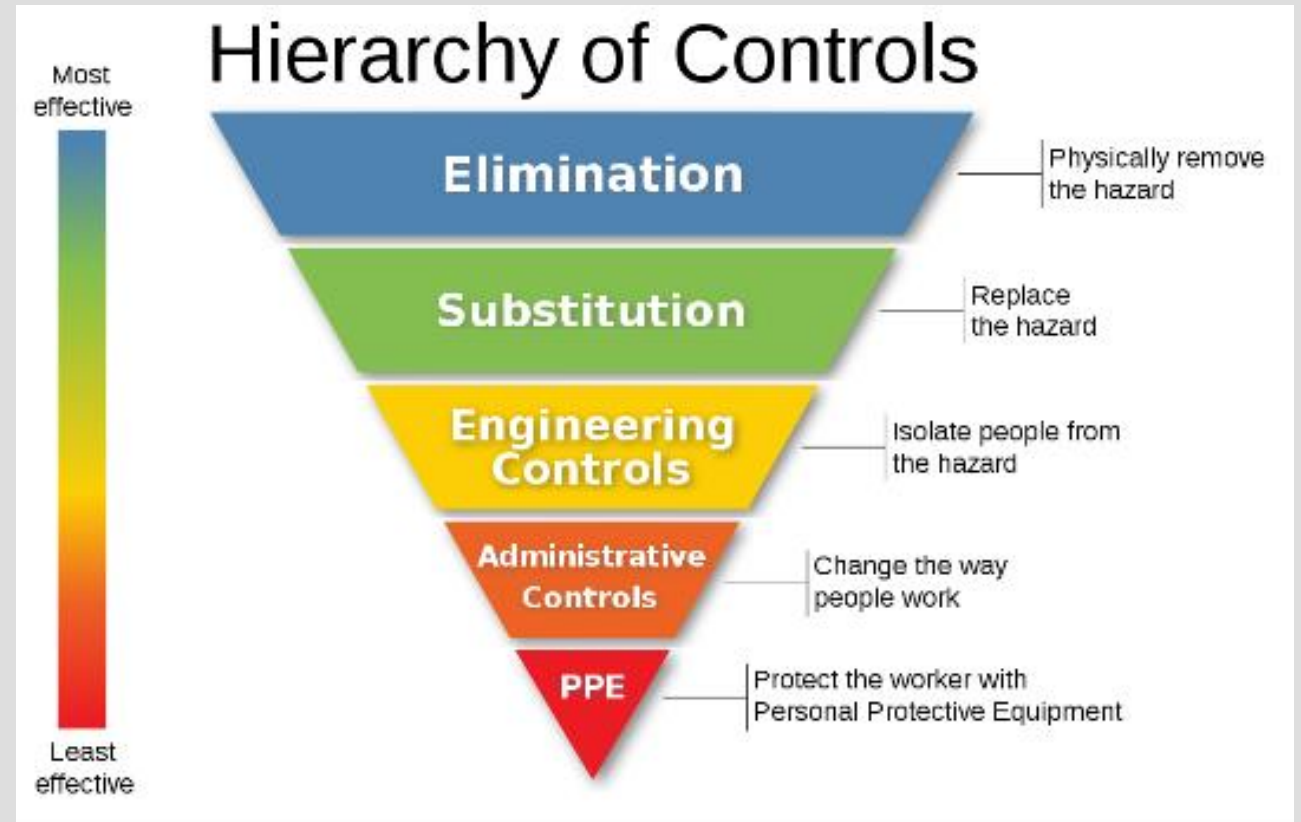

Elimination/Substitution

If possible, eliminate H₂S from your facility. Use other agents in replacement of it, if they are available. Understandably, H₂S is often a necessary evil. In these situations, other controls should be implemented to keep workers safe.






Engineering Controls

For many industries, H₂S is an inevitable hazard that cannot be eliminated or substituted. It is vital that employers make it safe for their employees to perform work. Engineering controls should eliminate or at least decrease the chances of employees coming in contact with H₂S.





Areas that might have H₂S present should be as isolated as reasonably possible. Isolation methods can include fences, walls, and blocked entries. When choosing how to isolate an area, care should be taken to avoid increasing concentrations by limiting the area's ventilation.



Employers should ensure that the integrity of any pipes, valves, storage tanks, or other equipment meant to handle or store H₂S is well maintained and in good condition. This will reduce the risk of employees being exposed to H₂S. Any equipment that is used for operations involving H₂S must be inspected and repaired routinely.






Pipes, storage containers, and any other equipment where H₂S is or might be present should be clearly marked with appropriate warning labels and signs. Make sure that the sign identifies the risk that H₂S poses to life.



Installing exhaust and ventilation systems in areas with H_2S is an effective way to reduce concentration of the gas. Ventilation should run continuously while work is being done in confined spaces.

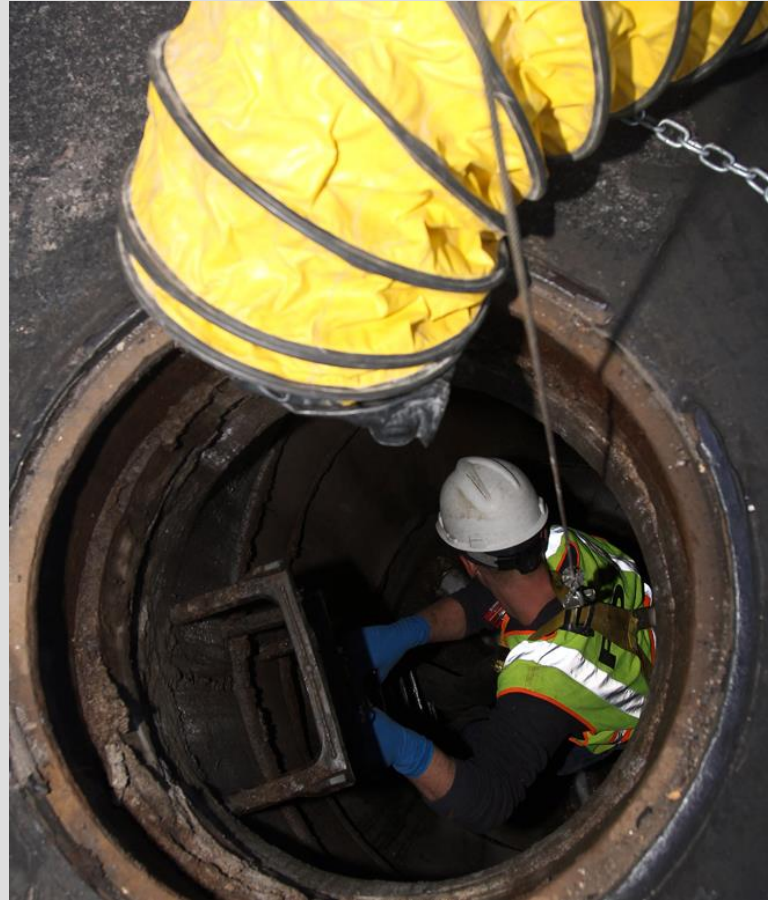



Ventilation and exhaust systems that operate around H_2S need to possess certain qualities due to the nature of the gas. Each system needs to be:

- Resistant to corrosion
- Explosion-proof
- Non-sparking
- Grounded
- Separate from other ventilation systems



Administrative Controls

Administrative controls can help employees avoid exposure. Generally speaking, these will be established according to regulation, but administration should make sure that they are familiar with these policies and how they apply to the workplace.



Image from oshatrain.org



There must be at least one attendant on each PRCS team, and that attendant must be present outside the space during entry. It is easy to fall into the trap of thinking the attendant assignment is just a “hole watch” with low-grade responsibilities. However, the reality is that the attendant has more duties listed than any other team member. No matter your assignment in confined space operations, no job—no matter how small or seemingly insignificant—should be taken lightly.






The attendant must:

- Know the hazards faced during entry, including information on the mode, signs, symptoms, and consequences of exposure to those hazards
- Know how to monitor atmospheric conditions prior to and during entry and properly record the data
- Know how to monitor possible behavioral effects of hazard exposure for the authorized entrants
- Control access to the space and keep count of entrants
- Remain outside the space until relieved by another qualified attendant
- Communicate with entrants throughout their work
- Monitor and evacuate entrants, if necessary
- Summon rescue help, if needed
- Warn unauthorized persons
- Be able to perform non-entry rescues

Additionally, the attendant cannot perform any other duties that may interfere with these primary tasks.



Similarly to confined space entry, establishing a buddy system on your worksite will facilitate quick responses in case there is an emergency. Having a worker who can watch another employee while performing a task that might lead to H₂S exposure will ensure that someone is able to call emergency rescue if that worker goes down.





It's best practice to train all workers on what to do if another worker is exposed to H_2S . This allows workers to rotate jobs when needed. Before workers are prepared to attend, they must be trained on:

- Who to call in case of emergency
- What information rescue teams will need
- Ways to prepare for rescue extraction



Perhaps one of the most difficult things that all workers need to understand is not to attempt to rescue another coworker that has been rendered unconscious in a confined space or hazardous area. Whether by H_2S or another hazard, workers cannot enter the space to perform a rescue unless they are thoroughly trained and have the proper equipment. Statistics show that approximately 40 percent of confined space fatalities are would-be rescuers.



Photo courtesy of Capitoltechrescue



Photo courtesy of JD Supra



When a coworker goes down in a hazardous area, the instinct to save him can be overwhelming. Even when trained not to attempt a rescue, workers will often forget themselves in such situations. Training workers to perform emergency rescues and giving them the proper equipment to do so in areas with high levels of H_2S gas may not only save the life of workers who have been exposed to the gas, but also the would-be rescuers.





Establishing procedures for preventing exposure and leaks will prevent H₂S from escaping. This should include frequent testing of equipment and inspections of pipes, containers, and other sources of H₂S with damage, wear, or potential for release of H₂S.



Photo courtesy of himiplex oil



Procedures for hot work should be established for operations where there is a risk of H₂S exposure. Testing for explosive gases must take place before performing any welding, cutting, or other type of hot work. Similar precautions should be taken in areas prone to H₂S exposure and leaks.



HOT WORK PERMIT

The supervisor, in issuing this permit, certifies that all safety factors have been considered and cared for satisfactorily.
Return this permit upon completion of the job which it is to cover to the authorizing supervisor. The supervisor will write "complete", date and initial across the face of the permit.

AREA OF HOT WORK:

WORK TO BE DONE:

	YES	NO	N/A
1 Read the Hot Work Permit Procedure			
2 Work area and equipment has been made free of flammable, combustible, and hazardous materials.			
3 Gas Test taken.			
4 Is a fire extinguisher on the job?			
5 Smoke alarms covered?			
6 Lines disconnected and/or blanked?			
7 Is a fire watch provided?			
8 Adjoining equipment and operations considered ok from standpoint of possible effect on the job.			
9 Other necessary precautions SPECIFY			

APPROVAL

I have personally checked the conditions necessary and as specified I authorize this "Hot" work to begin.

APPROVED BY _____ DATE _____ TIME _____

HOT WORK PERMIT IS GOOD FOR _____ HOURS ONLY
THIS PERMIT CAN BE ISSUED FOR ONLY ONE SHIFT. IT BECOMES VOID AT THE END OF WORK SHIFT DAY.

HOT WORK PERMIT

DO NOT REMOVE THIS TAG!

TO DO SO WITHOUT AUTHORITY WILL MEAN DISCIPLINARY ACTION!

IT IS HERE FOR A PURPOSE

REMARKS: _____


SEE OTHER SIDE

Photo courtesy of grainger.com





DANGER

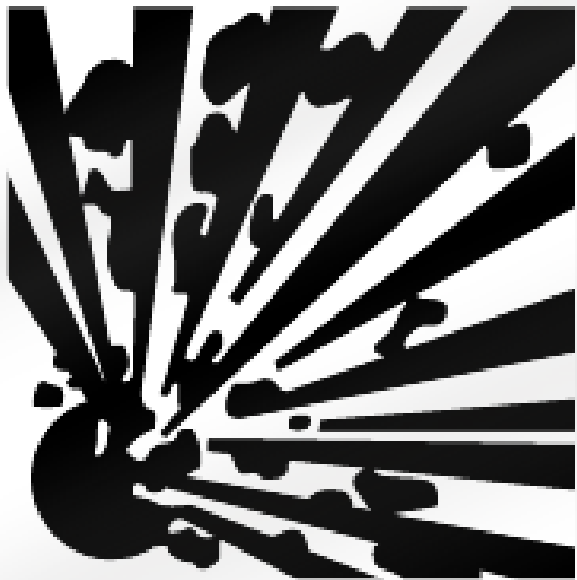

Explosive gas

When H_2S reaches certain concentrations that exceed the acceptable ceiling limit, it can be very explosive and deadly. When abundant amounts of H_2S are present, a single spark can ignite it. Special tools and equipment that will prevent sparking need to be used in these situations.



Accidental Release Measures for H₂S



- **What are accidental release measures for hydrogen sulfide?**
- **Personal Precautions:** Evacuate the area immediately. Isolate the hazard area. Keep out unnecessary and unprotected personnel. Evacuate downwind locations. Do not touch damaged containers or spilled product unless wearing appropriate protective equipment. Ventilate area. Eliminate all ignition sources. Use grounded, explosion-proof equipment. Distant ignition and flashback are possible.
- **Methods for Containment and Clean-up:** Liquid: stop or reduce leak if safe to do so. If not, allow liquid to vapourize. Ventilate the area to prevent the gas from accumulating, especially in confined spaces. Gas: stop or reduce leak if safe to do so. Ventilate the area to prevent the gas from accumulating, especially in confined spaces.



PPE

PPE is the final step in the hierarchy of controls. When working with hydrogen sulfide, there are extensive procedures for putting on and taking off PPE. For the purposes of this training, we have dedicated the next section to the proper use and care of PPE.



Personal Protective Equipment for H₂S



Regulations allow various respirators be used to guard against H₂S. However, at Halifax Water does not normally use respiratory protection to mitigate H₂S. HW has safety policies and procedures in place to shut down the jobsite if the H₂S concentration goes above 5 ppm.



If the H₂S hazard can not be eliminated the work is generally contracted to H₂S professionals.




Respirators

Personal respirators are important. In fact, whenever regulating measures are not adequate to inhibit atmospheric contamination, employees are required to wear personal respirators.

Safety regulations require that the employer must provide the correct type of respirator for the substance and level of exposure involved.

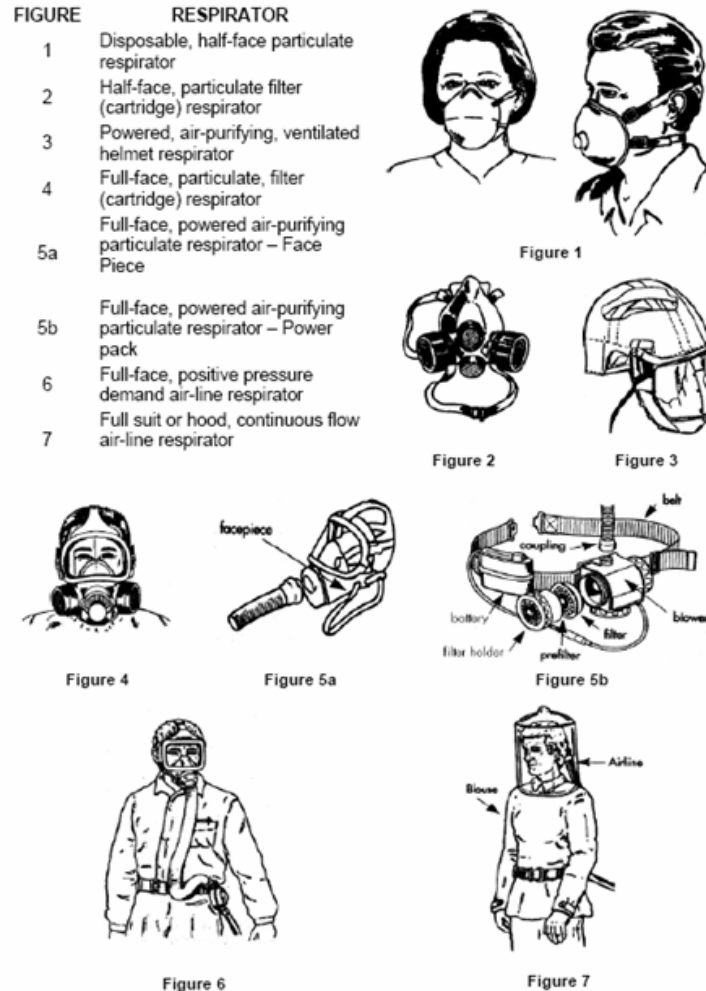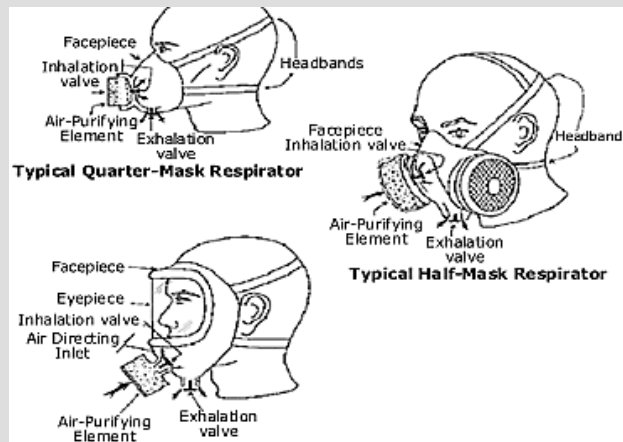

Note: These diagrams are indicative only. In order to show the correct respirator fit they do not show the use of hoods. Respirators must always be worn under a hood.

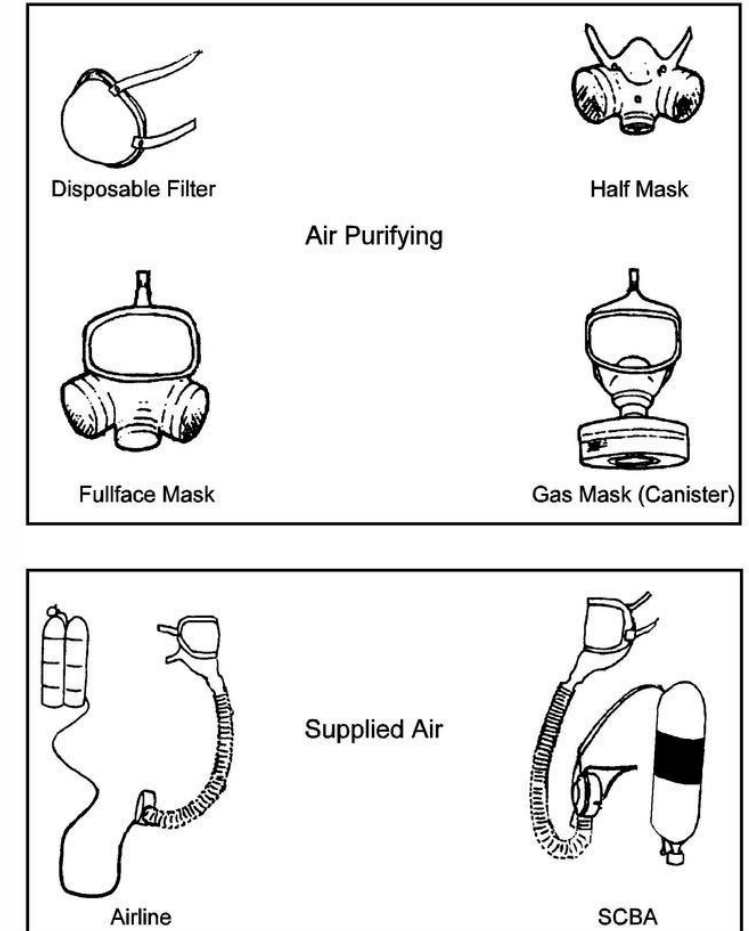




HW staff may be required to wear respirators for their health when performing “dirty work” like spraying off equipment or while using paints or solvents.

Wearing respirators may also be required when working in confined spaces where there may be particles in the air.



Air-Purifying Respirator

Air-purifying respirators use filters to remove harmful substances from the air. They do not supply oxygen; instead, they filter the existing air. For this reason, they must never be used in oxygen-deficient atmospheres or in other atmospheres that are immediately dangerous to life or health (IDLH).

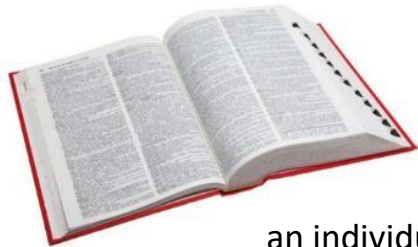

IDLH refers to any condition which poses an immediate threat to the health or life of an entrant, or would cause irreversible adverse health effects, or interfere with an individual's ability to escape unaided from a permit space. In these cases, at least one employee (the "standby employee") is to be located outside the IDLH atmosphere and maintain visual, voice, or signal line communication with the employee(s) in the IDLH atmosphere. They should be trained and equipped in case an emergency rescue is needed.



Filtering Facepiece Respirators



Photo courtesy of Shutterstock

Filtering facepiece respirators (FFRs) remove particles from the inhaled airstream of the wearer. They may be referred to as “N95 respirators”. They are also sometimes called disposable respirators because the entire respirator is discarded when it becomes unsuitable for further use because of hygiene, excessive resistance, or physical damage.

FFRs are divided into classes based on their filtration capabilities. “N95” is a term referring to the N95 filter class, which removes at least 95% of airborne particles using a “most-penetrating” sized particle during “worst case” NIOSH testing.

The FFR classes include N (not resistant to oil), R (somewhat resistant to oil), and P (strongly resistant to oil) series, which are available at 95, 99, and 100 filtration efficiency levels.

FFRs provide protection against particles, but not gases or vapors, and should not be used for respiratory protection to protect against hazardous gases or vapors. These classes and oil-resistant designations are applicable to all types of air-purifying respirators.

N95, N99, N100 – Filters at least 95%, 99%, 99.97% of airborne particles. Not resistant to oil.


R95, R99, R100 – Filters at least 95%, 99%, 99.97% of airborne particles. Somewhat resistant to oil.

P95, P99, P100 – Filters at least 95%, 99%, 99.97% of airborne particles. Strongly resistant to oil.

FFRs form a tight seal against the user’s face, covering the nose and mouth. As the user inhales air through the facepiece, particulate material collects on the fibrous material of the filter, which removes the particulate contaminant from the airstream. An FFR may have an exhalation valve located on the filter, which reduces breathing resistance during exhalation.



Non-Powered Air Purifying Particulate Filter Respirators



Inspection

Regardless of the respirator, it is vital that you inspect yours for wear and tear before *and* after each use, paying specific attention to any rubber or plastic parts that can easily deteriorate. The face piece, headband, valves, connecting tube, fittings, and cartridges/filters must be in good condition. A respirator inspection must include a check for tightness of attachments. Replace chemical cartridges and canisters as necessary, and replace mechanical filters as needed to avoid experiencing breathing difficulties.




Only an experienced person is permitted to make repairs, using parts specifically designed for the respirator. This person must consult the manufacturer's instructions for any repair, and no attempt should be made to repair or replace components outside the manufacturer's recommendations. Employers must keep records of inspection dates and findings.



Cleaning And Storage


After use, respirators should be cleaned and disinfected as necessary, especially if they were used in an emergency rescue situation. At the very least, they should be wiped down with a manufacturer-approved respirator refresher wipe. This will help keep bacteria, fungus, etc. at bay. There are many instances when a worker's failure to consistently clean his respirator led to prolonged illness and discomfort.



Outside of a general cleaning, a deep cleaning is not only wise but required, especially as it concerns the changing of the cartridges. While there are general guidelines for cleaning, you should strictly follow the manufacturer's schedule regarding when and how your type of respirator should be taken apart and cleaned. Deep cleaning should include a thorough washing of any and all straps, valves, hoses, diaphragms, seals, face shields, etc.



Once cleaned and allowed to dry completely, new cartridges should be installed, and the respirator should be stored in a way that guards it against dust, sunlight, extreme temperatures, excessive moisture, or any detrimental chemicals. Consider hanging it in a clean location, like a locker designated for such a purpose, or placing it in an approved sealable bag. When packed or stored, make sure each respirator is positioned so as to allow it to maintain its natural shape and formation. This will prevent the rubber or plastic from deforming and cracking.



Training


It is easy to assume pre-job that you can just slip on a mask and go, but not only is training essential for proper respirator use, it is required. Both supervisors and workers must be taught how to properly select, don, use, doff, and maintain their respirators; any equipment limitations should also be a part of this training.



Fit Test



An ill-fitting mask won't do you any good. Contaminated air leaking in in any degree could prove fatal. This process is called a "fit test." A fit test tests the seal between the face piece and your face. It can take about 20 minutes to complete and should be performed *at least* annually. This can be done by your employer or by a third party.





Did you know?

There are two types of fit tests: qualitative and quantitative

Qualitative fit testing is a pass/fail test method that uses your sense of taste or smell, or your reaction to an irritant in order to detect leakage into the respirator face piece. Qualitative fit testing does not measure the actual amount of leakage. Whether the respirator passes or fails the test is based simply on you detecting leakage of the test substance into your face piece. There are four qualitative fit test methods generally accepted:


- Isoamyl acetate, which smells like bananas;
- Saccharin, which leaves a sweet taste in your mouth;
- Bitrex, which leaves a bitter taste in your mouth; and
- Irritant smoke, which can cause coughing.

Qualitative fit testing is normally used for half-mask respirators - those that just cover your mouth and nose. Half-mask respirators can be filtering face piece respirators - often called "N95s" - as well as elastomeric respirators.

Quantitative fit testing uses a machine to measure the actual amount of leakage into the face piece and does not rely upon your sense of taste, smell, or irritation in order to detect leakage. The respirators used during this type of fit testing will have a probe attached to the face piece that will be connected to the machine by a hose. There are three quantitative fit test methods generally accepted :

- Generated aerosol; Ambient aerosol; and Controlled Negative Pressure.

Quantitative fit testing can be used for any type of tight-fitting respirator.





You should be tested for the exact make, model, style and size of respirator you will be using.

Also, many workers wear prescription glasses or are required to wear personal protective equipment while working (goggles, ear muffs, etc.). If this describes you, then make sure you are wearing these items during the fit test.





Once you've passed the fit test, you must use that specific make, model, style and size of respirator every time. If it becomes damaged; the job changes, thus requiring a different kind; or you are assigned a different kind, you must be fit tested again. The same goes for whenever there is a change significant enough to alter your physical condition:

- Large weight gain or loss
- Major dental work or a change in dentures
- Facial surgery
- Significant scarring
- Changes in hairstyle or facial hair (facial hair should never be where the mask seals to the face)

Fit test records must be retained until the next evaluations or tests are administered.



User Seal Check



A fit test should not be confused with a user seal check. A user seal check is a quick check performed by the wearer *each time* the respirator is put on. It determines if the respirator is properly seated to the face or needs to be readjusted. It is important that you understand “user seal checks” are never substitutes for qualitative or quantitative fit tests.





Did you know?

There are two approved types of seal checks: positive pressure check/negative pressure check and the manufacturer's seal check procedures

1. Positive/Negative Pressure Check:

A. Positive pressure check. Close off the exhalation valve and exhale gently into the face piece. The face fit is considered satisfactory if a slight positive pressure can be built up inside the face piece without any evidence of outward leakage of air at the seal. For most respirators this method of leak testing requires the wearer to first remove the exhalation valve cover before closing off the exhalation valve then carefully replacing it after the test.

B. Negative pressure check. Close off the inlet opening of the canister or cartridge(s) by covering with the palm of the hand(s) or by replacing the filter seal(s), inhale gently so that the face piece collapses slightly, and hold the breath for ten seconds. The design of the inlet opening of some cartridges cannot be effectively covered with the palm of the hand. The test can be performed by covering the inlet opening of the cartridge with a thin latex or nitrile glove. If the face piece remains in its slightly collapsed condition and no inward leakage of air is detected, the tightness of the respirator is considered satisfactory.

2. Manufacturer's Recommended User Seal Check Procedures

The respirator manufacturer's recommended procedures for performing a user seal check may be used instead of the positive and/or negative pressure check procedures provided that the employer demonstrates that the manufacturer's procedures are equally effective.



Safety Equipment

Wearing fall protection gear while in areas with H₂S hazards can be lifesaving. The gas has the ability to render you unconscious, even instantaneously in the right concentrations. If you are climbing a ladder or are otherwise high up when the gas affects you, your fall could be deadly without the right protection.



When working in spaces that may contain H₂S, certain equipment might be necessary. When worn, this equipment will allow for a non-entry emergency rescue. Such equipment can include but is not limited to:

- Body harnesses
- Lanyards
- Tripods
- Ropes and cables





Safety equipment should be inspected before and after each use. If there are any tears, frays, cuts, or other damage on the equipment, it must be taken out of service immediately. Workers should be trained on how to thoroughly check all equipment before use.



H₂S Hazards





H₂S is among the most dangerous substances workers are exposed to on their sites. Comparable to hydrogen cyanide, the gas used in mass executions during WWII, H₂S is over five times more deadly than carbon monoxide.



The Life & Times

Monday, September 18, 2014


Safety in the Workplace- A3

Worker fatality, recent accident being investigated

Federal Way – Early in the morning last Saturday, local construction workers hired to install several utility poles were involved in an accident that killed two and injured four.

The horrific chain of events started with a relatively simply accident at 7 am during rush hour, when a

car s
been
spec

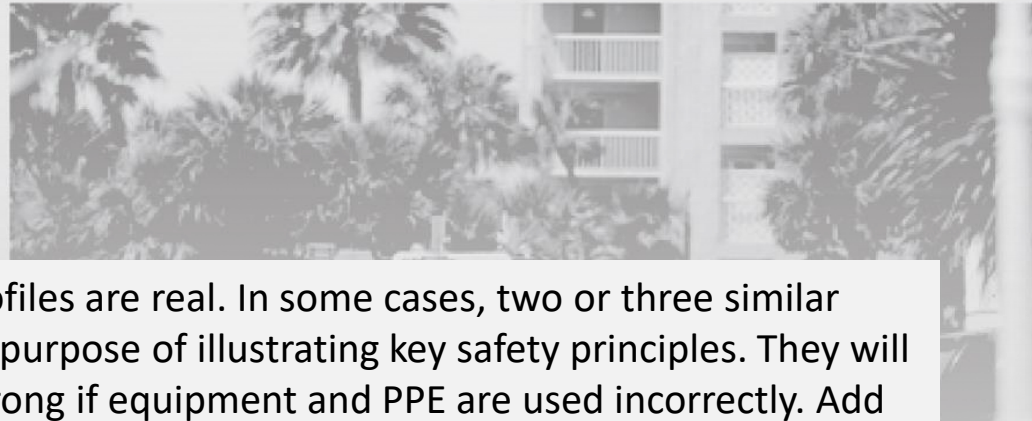

The following investigated accident profiles are real. In some cases, two or three similar accidents have been combined for the purpose of illustrating key safety principles. They will show just how quickly things can go wrong if equipment and PPE are used incorrectly. Add to that a few safety procedures that were ignored and injuries or fatalities were the result.





INVESTIGATED ACCIDENT PROFILE -- CASE STUDY --

Accident Profile #1: Three sewage workers were performing maintenance on a 24ft (7.3 m) deep wet well. Employee #1 was attempting to dislodge a rubber plug from a sewer pipe within the well while Employees #1 and #2 were pulling on the plug from above. After some difficulty removing the plug, Employee #1 began ascending the ladder when he suddenly lost consciousness and fell to the bottom. Employee #2 began descending the latter when he, too, fell unconscious. In an attempt to rescue his fellow coworkers, Employee #3 attempted to descend and provide emergency rescue, but was also rendered unconscious. All three workers died from asphyxiation. **What went wrong?**





All three employees died from exposure to H_2S gas. No atmospheric testing had been done prior to entry. Before entering any confined space, atmospheric testing should be performed. If done properly, the testing would have alerted the workers to the H_2S that was present in the well, likely saving all three of their lives.





What made this event even more tragic were the deaths of the two would-be rescuers. Although it might be hard to watch a fellow worker lie unconscious, rushing in to save him will only put you in danger. You will more than likely succumb to the same hazards and have to be rescued as well, thus prolonging the rescue of your coworker. Calling for help, testing the atmospheric conditions, and preparing for the rescue team will do more to save your friend than attempting to rescue him yourself.





Never enter a confined space without testing it first. If there is H_2S gas present, make sure to use ventilation before entry to reduce the concentration to acceptable levels. Make sure that you wear the respirators and PPE necessary to protect yourself. Never enter a confined space to perform a rescue without proper training, equipment, and support.





INVESTIGATED ACCIDENT PROFILE -- CASE STUDY --

Accident Profile #2: Employees #1 and #2 entered a 10-foot manhole to secure a leaking air plug. Employee #2 descended the manhole ladder and was overcome by hydrogen sulfide, falling approximately five feet to the bottom of the manhole. The manhole attendant screamed for help as Employee #1 descended the ladder in an attempt of rescue unconscious Employee #2. Employee #1 was promptly overcome by hydrogen sulfide, lost consciousness, and followed his coworker to the bottom of the ditch. The excavator operator called Emergency Services and prevented any more workers from entering the manhole. He then directed air from a compressor into the crevice, which allowed both employees to regain consciousness. Finally, a strap was lowered into the hole to help the employees escape. **What went wrong?**





Both employees were exposed to high levels of H_2S . Again, no atmospheric testing or monitoring took place prior to entry to the confined space. Whenever entering a confined space, pre-atmospheric testing and monitoring must be conducted.





Although the workers were entering a deep manhole, no fall protection was offered to them before they descended. When possible, having attached lifelines, lanyards, or other forms of fall protection and retrieval systems can help prevent injuries and falls during exposure and may offer a safe rescue from outside the space.





The excavator operator responded appropriately by preventing other workers from entering the space by using ventilation to bring fresh air to the unconscious employees without exposing anyone else to the hazards. This, coupled with the safety strap, likely saved the lives of the two men in the manhole.





INVESTIGATED ACCIDENT PROFILE -- CASE STUDY --

Accident Profile #3 While working inside a 27ft (8.2m) excavation pit, workers noticed a noxious gas smell. Concerned about both the gas and the integrity of the pit, the foreman had all his workers evacuate the area. Employee #1 reentered the pit to retrieve a tool and was overcome by the gas. In an attempt to save the worker, a police officer followed him in. Suddenly feeling ill, the officer began climbing back up the ladder, but fell to the bottom of the pit, which was flowing with water. Though he attempted to climb out of the water, the officer only rolled over and drowned. **What went wrong?**



There were several things wrong with this scenario, the first being a lack of training of employees. Workers were made aware of the potential existence of gas, but delayed leaving the excavation site when they noticed signs of its presence. The general lack of communication between the crew and emergency responders made the would-be rescuer unaware of the toxic gas. As a first responder, the police officer was trained to perform an emergency extraction, and he entered the pit without protective gear. Training workers on the nature and dangers of H₂S and what to do in emergency situations will prevent future tragic outcomes like these from occurring.





The crew was warned beforehand of the potential presence of H_2S , which was common in the marshy area where they were located. Workers noticed the scent of H_2S and immediately felt short of breath, sending two employees out for blowers to ventilate the pit. In the meantime, the crew remained in the area, operating without ventilation. No atmospheric monitoring was performed, despite the knowledge of potential hazards. All of this oversight contributed to the death of the officer, as well as serious injury to multiple members of the crew.





INVESTIGATED ACCIDENT PROFILE -- CASE STUDY --

Accident Profile #4: Employee #1 entered a manure pit to replace a broken line. Despite warnings, he had worked in the pit before without issue and insisted that he would be ok. As he was tying the line, he suddenly fell unconscious. Employee #2, who had warned Employee #1 previously, called in the accident. Responding to the call, Employee #3 arrived on scene. Despite warnings from Employee #2, Employee #3 entered the pit to tie a line to Employee #1, but also fell unconscious. Rescue teams arrived with SCBAs and retrieved the two victims. Both were pronounced dead at the hospital. The cause of death was asphyxiation by H₂S. **What went wrong?**






Photo courtesy of Michigan Farms Bureau

Employee #1 should have never entered the pit without testing or proper safety equipment. Even if you have worked around H_2S before without issue, you should know that toxic fumes can still form under the right conditions. In this case, H_2S formed in the pit and rendered Employee #1 unconscious. Employee #3 attempted to rescue Employee #1 without protection and, in turn, put his own life in danger.



Photo courtesy of JD Supa



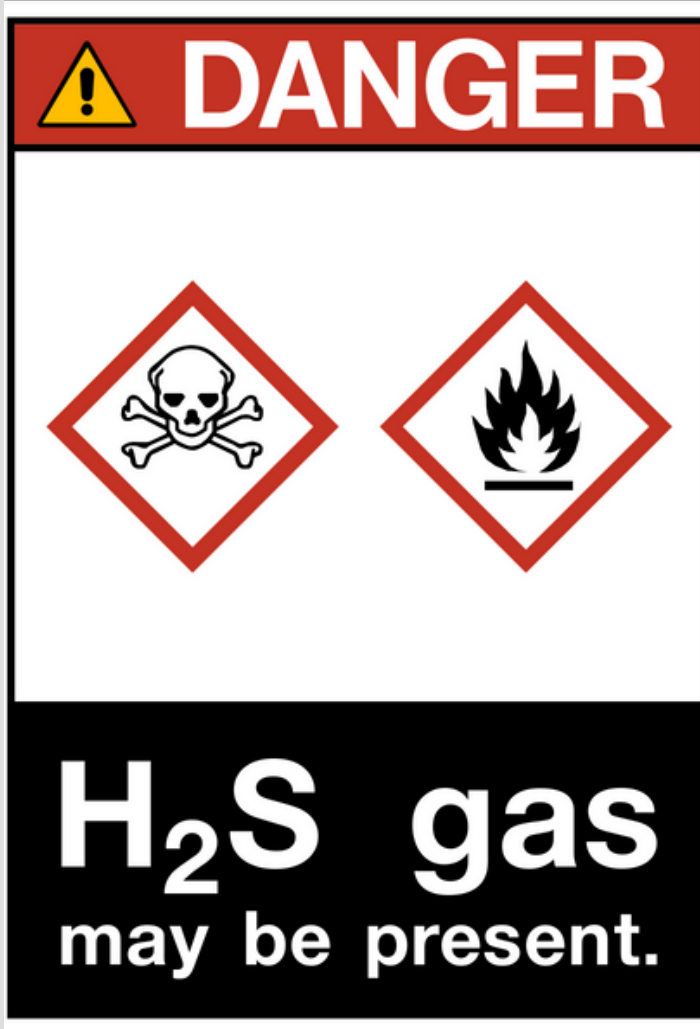

Fire Hazards and Extinguishing Media for H₂S

- **What are fire hazards and extinguishing media for hydrogen sulfide?**
- **Flammable Properties:** EXTREMELY FLAMMABLE GAS. Can easily ignite. Can readily form explosive mixture with air at room temperature.
- **Suitable Extinguishing Media:** Carbon dioxide, dry chemical powder, water spray or fog.
- **Specific Hazards Arising from the Chemical:** Gas may travel a considerable distance to a source of ignition and flash back to a leak or open container. Gas may accumulate in hazardous amounts in low-lying areas especially inside confined spaces, resulting in a health hazard. Heat from fire can cause a rapid build-up of pressure inside cylinders. Explosive rupture and a sudden release of large amounts of gas may result. Cylinder may also rocket. In a fire, the following hazardous materials may be generated:
 - corrosive sulfur oxides.



Stability and Reactivity Hazards of Hydrogen Sulfide

- **What are the stability and reactivity hazards of hydrogen sulfide?**
- **Chemical Stability:** Normally stable.
- **Conditions to Avoid:** Open flames, sparks, static discharge, heat and other ignition sources.
- **Incompatible Materials:** Highly reactive. Increased risk of fire and explosion on contact with: metal oxides (e.g. copper oxide), oxidizing agents (e.g. peroxides), strong bases (e.g. sodium hydroxide). In the presence of water, corrosive to: carbon steel. Not corrosive to: aluminum alloys.
- **Hazardous Decomposition Products:** None known.
- **Possibility of Hazardous Reactions:** None known.



CONCLUSION:



SAFETY IS EVERYONE'S RESPONSIBILITY



When working with H₂S, you can help ensure safe operations by knowing and following all safe work practices and safety regulations applicable to your workplace. When in doubt during any phase of an operation, take the time to stop and consult your employer, the standards, and/or equipment manufacturers. Time is money, true, but a mistake made to save time can cost money, and even lives!

